



S50000 SERIES

QPL: M83446/06



ALL PARTS AVAILABLE AS CLASS S+ OR CLASS B

MIL-STD-981

Inductance Range (uH)	Typical Q	Current Rating (mA)
0.005 to 10	28 to 40	100 to 750

(/(&75,&\$/ 63(&,) ,&\$7,216


‡, QGXFW DQFH 10.0050.0110 uH
 ‡, QGXFW DQFH 7ROHUDQFH Standard is
 WLJKWRUH DDQE KDSRCH TXHVW
 ‡5HVLVWDQFH WR 6R0FHUVHFRVGV
 ‡2SHUDWLQJ 7HPSRUDRVX&H
 ‡6WRUDJH 7HPSH&DWRX&H
 ‡7HPSHUDWXUH & 5D&DWR&SPELHQW
 ‡7HPSHUDWXUH & RHILFLHQW RI , QG
 ±3 16 WK&X 330R&0D[
 ‡2XWJDVV LQJ PHHWV 1\$6\$ V\$707 63 !

)(\$785(6


‡, QWHUQDO :HOGHG 7HUPLQDWLRQV
 ‡7HUPLQDWLRQV
 ‡2SWLRQDO 7HUPLQDWLRQV RQ 5HT.
 Gold plated terminations
 ‡7DSH DQG 5HHO 3DFNDJLQJ \$YDLO
 ‡5HFRPPHQGHG 0RXQLQJ 7HFKQLT.
 ±5HIO&DS&DWR&R&HULQJ
 ±&RQGXR&R&H
 ±:LU&R&G&R&R&O

\$33/, &\$7,216


‡\$GGLWLRQDO \$SSOLF&DWLRQ *UDGH
 ±Military Grade (MIL-PRF-83446)
 ±&RPPHULDO *UDGH RU (TXLYDC

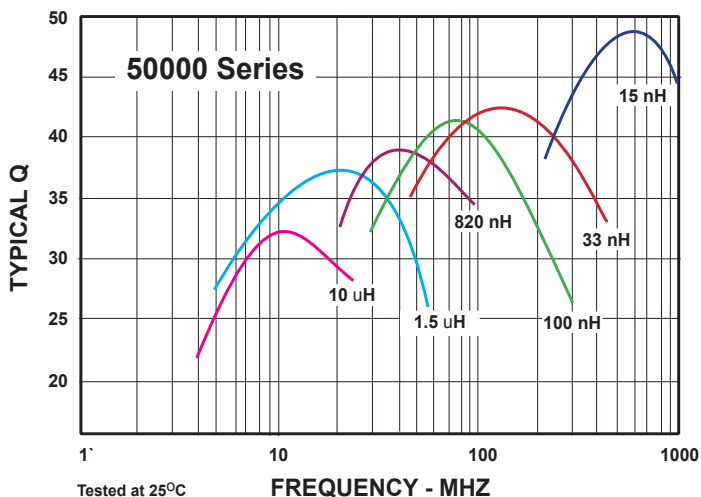

NO TABS

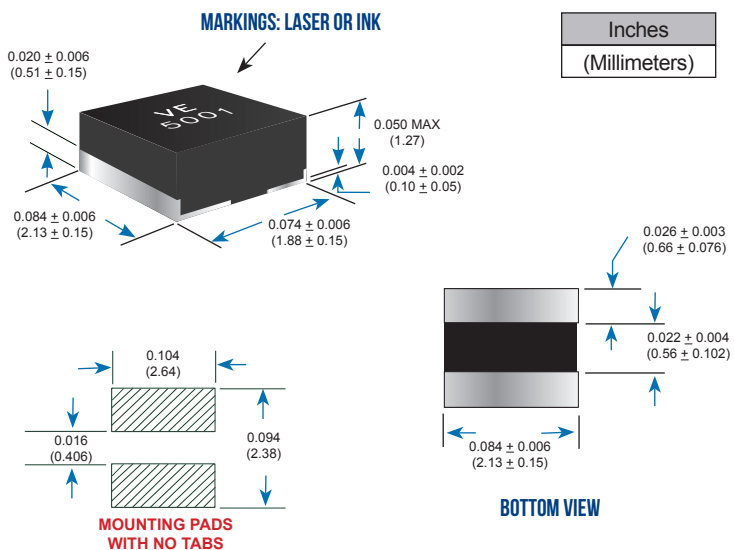

WITH TABS

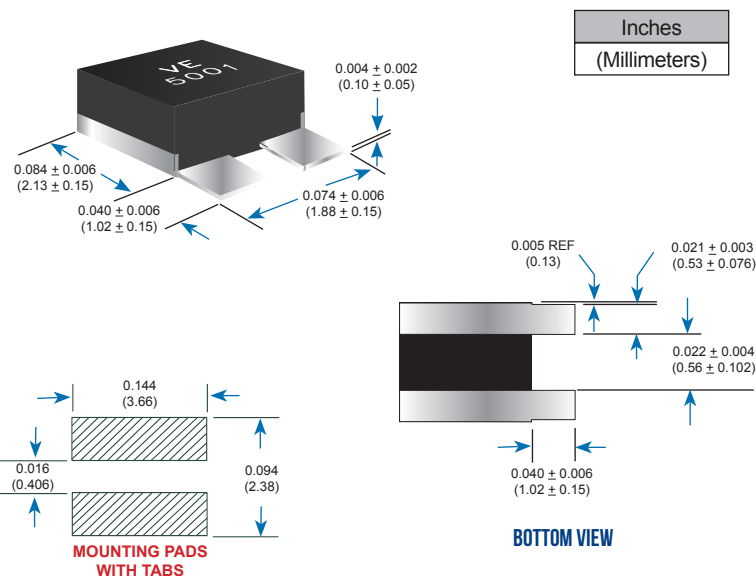

S50000 SERIES



