



# 42000 SERIES

## SIZE CODE 1 QPL: M27/356



MIL-PRF-27

### ELECTRICAL SPECIFICATIONS

- **Operating Temperature:** -55°C to +130°C
- **Storage Temperature:** -60°C to +135°C
- **Temperature Rise @ 100°C:** ≤ 30°C
- **Inductance at rated DC:** ≥ 80% of nominal
- **Dielectric Withstanding Voltage:** 200 V<sub>RMS</sub>
- **Different electrical values available upon request**


### FEATURES

- **Compact**, low profile, ideal for automatic placement
- Built to meet **MIL-PRF-27** specifications
- **Terminations:** Tin-lead
- **Magnetically shielded**
- **Other termination finishes available**
- **Order** to Mil-spec part number or VE part number


### APPLICATIONS

- Filter inductors
- Power supplies
- Ripple suppressors
- DC/DC converters
- Common mode chokes
- SEPIC converters
- Isolation transformers

Inductance Range (mH)	DCR (Ohms)	Current Rating (Amps)
0.01 to 20	0.035 to 54	0.06 to 2.36

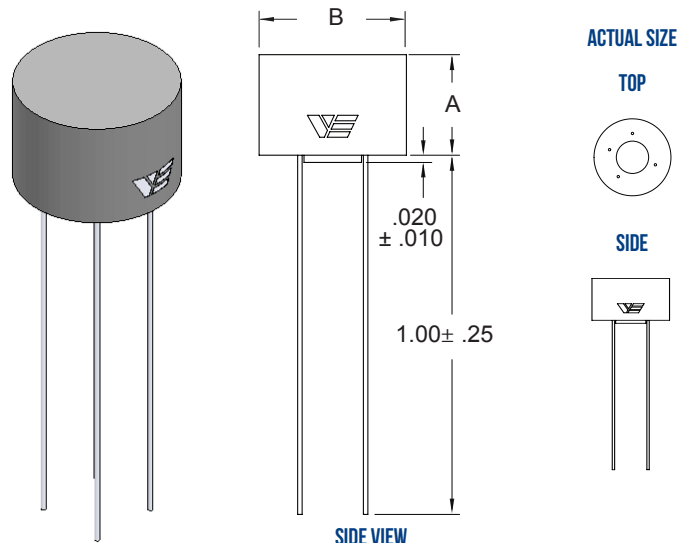


SIZE CODE	A MAX	B MAX	C ± .010	D ± .010	TERMINAL DIAMETER
1 (IN)	.280	.410	.260	.160	.012 ± .002
1 (MM)	7.11	10.41	6.6	4.06	0.31

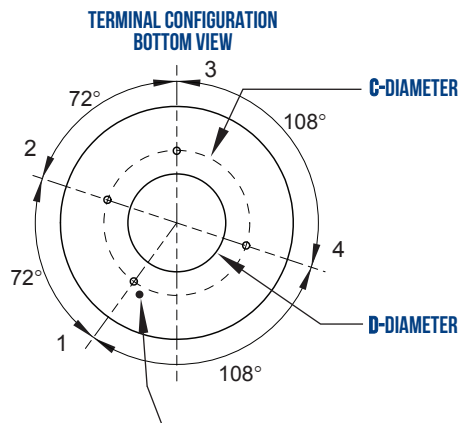


Dot identifies terminal 1. Terminals are clockwise from pin 1.

MARKINGS: LASER ETCH OR INK

### SCHEMATIC



### TYPICAL USER CONNECTIONS

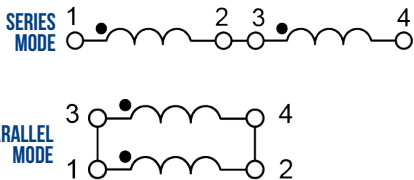

## 42000 SERIES

SIZE CODE 1





## DATA TABLE

M27/356 Dash No.	Vanguard Part Number	Series Inductance (mH)*	Series DC Current max (Amps)	Series DCR (Ohms ±25%)	Parallel Inductance (mH)	Parallel DC Current max (Amps)	Parallel DCR (Ohms ±25%)
-01	<b>41416</b>	20	0.06	54	5	0.12	13.5
-06	<b>42652</b>	15	0.07	40.5	3.75	0.14	10.125
-11	<b>42657</b>	10	0.08	27	2.5	0.16	6.75
-16	<b>42662</b>	7.5	0.10	20.3	1.88	0.20	5.075
-21	<b>42667</b>	5.0	0.12	13.5	1.25	0.24	3.375
-26	<b>42672</b>	3	0.16	8.1	0.75	0.32	2.025
-31	<b>42677</b>	2	0.19	5.4	0.5	0.38	1.35
-36	<b>42682</b>	1	0.27	2.7	0.25	0.54	0.675
-41	<b>42687</b>	0.750	0.31	2	0.1875	0.62	0.5
-46	<b>42692</b>	0.500	0.38	1.3	0.125	0.76	0.325
-51	<b>42697</b>	0.250	0.53	0.66	0.0625	1.06	0.165
-56	<b>42702</b>	0.100	0.78	0.30	0.025	1.56	0.075
-61	<b>42707</b>	0.040	1.18	0.14	0.01	2.36	0.035

Inductance measured at 10 kHz, 0.1 V<sub>RMS</sub>

\* Inductance tolerance +25/-5 %

### CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

## 42000 SERIES

SIZE CODE 1

