



CMN16 SERIES

NANOCRYSTALLINE COMMON MODE CHOKES




ELECTRICAL SPECIFICATIONS

- Operating Temperature: -55°C to $+125^{\circ}\text{C}$
- Storage Temperature: -60°C to $+130^{\circ}\text{C}$
- Temperature Rise @ 100°C : $< 30^{\circ}\text{C}$
- Dielectric Withstanding Voltage: $1000 \text{ V}_{\text{RMS}}$
- Overload Current: 1.5 times rated current
- Different electrical values available upon request

FEATURES

- Terminations: SnPb, Lead Free (RoHS)
- Resistance to Soldering Heat: 265°C for 10 seconds
- Moisture, Shock and Immersion Resistant
- Magnetically Shielded
- Ideally designed for GaN applications and higher switching frequencies
- Designed with nanocrystalline core for superior thermal stability and higher frequency operations



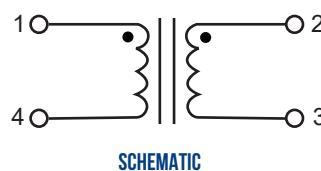


SCHEMATIC

Inductance Range (mH)	DCR max (Ohms)	Current Rating (A)
0.39 - 50	0.0024 - 0.105	15.2 - 2.3

DIMENSIONS: INCHES (MM)

MARKINGS: LASER ETCH OR INK

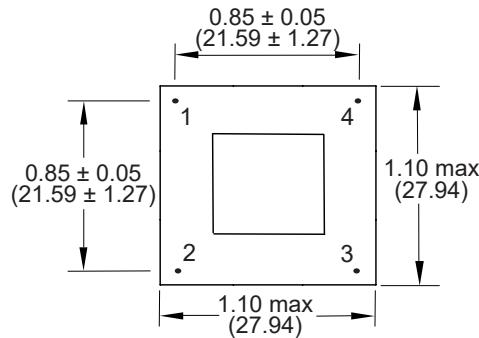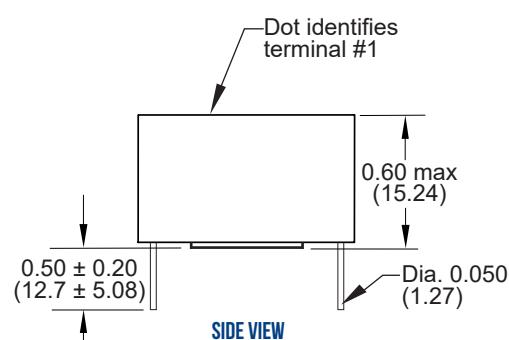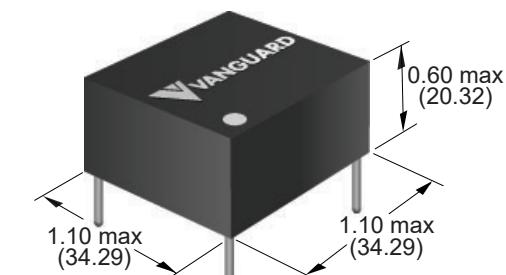

BOTTOM VIEW

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

CMN16 SERIES





DATA TABLE

Vanguard P/N	Inductance @ 10kHz ± 30% (mH)	DCR Max (Ohms)	Rated Current (A)
CMN16-393TH	0.39	0.0024	15.2
CMN16-693TH	0.69	0.0032	13.2
CMN16-114TH	1.1	0.004	11.8
CMN16-284TH	2.8	0.008	8.3
CMN16-524TH	5.2	0.014	6.4
CMN16-724TH	7.2	0.020	5.2
CMN16-105TH	10	0.030	4.3
CMN16-175TH	17	0.050	3.4
CMN16-255TH	25	0.060	3.1
CMN16-395TH	39	0.090	2.4
CMN16-505TH	50	0.105	2.3

1/ Inductance measured at 10 kHz, 0.10 V_{RMS}

2/ DCR measured at room ambient temperature (25°C)

VE PART NUMBER
STRUCTURE KEY

EXAMPLE: CMN16-393THS-1-B

INDUCTANCE
(uH) (mH)

393 = 390 uH
284 = 2.8 mH
505 = 50 mH

TERMINATION

S	SnPb
R	Pure Tin

RELIABILITY

1	COTS/EM
7	Other

PACKAGING
(Default Bulk)

B	Bulk
---	------

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

CMN16 SERIES

