



XTHCL3 SERIES MAXIMUM POWER DENSITY



+200°C

Inductance Range (mH)	DCR max (Ohms)	Current Rating (A)
0.027 - 17.0	0.006 - 2.8	1.7 - 50

ALL DIMENSIONS: INCHES

MARKINGS: LASER ETCH OR INK

ELECTRICAL SPECIFICATIONS


- **Operating Temperature:** -40°C to +200
- **Storage Temperature:** -55°C to +200
- **Temperature Rise:** See Performance Curves
- **Dielectric Withstanding Voltage:** 500 V_{RMS}
- **Different electrical values available upon request**

FEATURES


- Ideal for geophysical applications in environments up to 200°C
- **Terminations:** Tin-lead, Lead Free (RoHS), HMP required high temperature version
- **Moisture, Shock and Immersion Resistant**
- **Magnetically Shielded**

APPLICATIONS

- DC power choke
- Resonant inductor
- Input/Output filter
- Swinging inductor

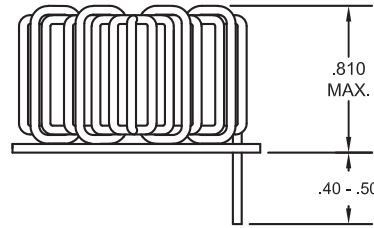


SIDE VIEW

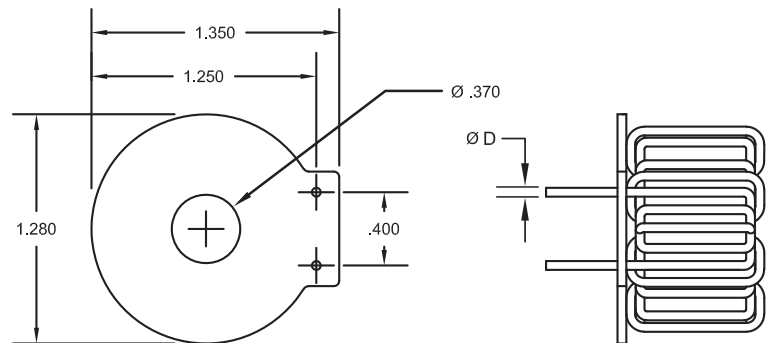

BOTTOM VIEW

SIDE VIEW



SCHEMATIC

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types





DATA TABLE

Vanguard P/N	Inductance ±10% (mH)	Inc. Inductance (mH)	DCR max (Ohms)	Rated Current (ADC)	Lead Dimension "D"
XTHCL3-270	0.027	0.015	0.006	50	0.082
XTHCL3-430	0.043	0.031	0.015	35	0.065
XTHCL3-680	0.068	0.033	0.015	35	0.058
XTHCL3-101	0.10	0.067	0.02	22	0.058
XTHCL3-231	0.23	0.120	0.04	15	0.051
XTHCL3-611	0.65	0.380	0.11	9.9	0.041
XTHCL3-102	1.0	0.670	0.18	7.1	0.033
XTHCL3-182	1.8	1.3	0.45	4.5	0.026
XTHCL3-252	2.5	1.8	0.60	4.0	0.024
XTHCL3-502	5.0	3.5	1.0	3.0	0.021
XTHCL3-752	7.5	5.4	1.6	2.4	0.019
XTHCL3-103	10.0	6.7	1.8	2.2	0.019
XTHCL3-153	15.0	10.3	2.6	1.8	0.017
XTHCL3-173	17.0	11.3	2.8	1.7	0.017

1/ Inductance measured at 10 kHz, 0.1 V_{RMS}

2/ DCR measured at room temperature

3/ Incremental inductance is the approximate value that the inductance will drop when rated current is applied

4/ Maximum Weight: TBD

VE PART NUMBER STRUCTURE KEY

INDUCTANCE (mH)

The first two digits are significant. The last digit specifies zeroes to follow:

102 = 1000 mH

EXAMPLE: XTHCL3-102KS-7-B

TOLERANCE (%)

K	± 10
---	------

TERMINATION

S	SnPb
R	Pure Tin

RELIABILITY

7	Other
---	-------

PACKAGING (Default Bulk)








B	Bulk
---	------

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

XTHCL3 SERIES




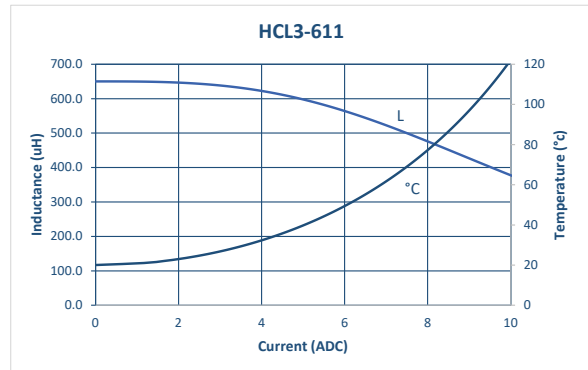
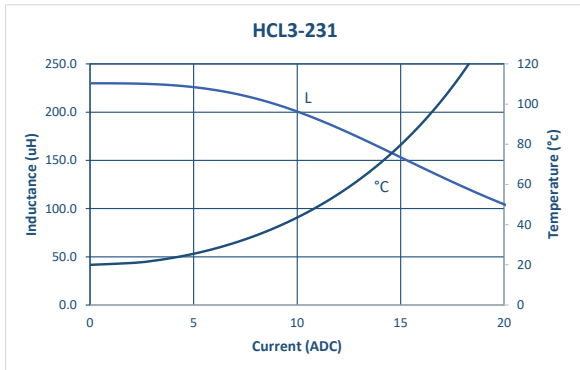
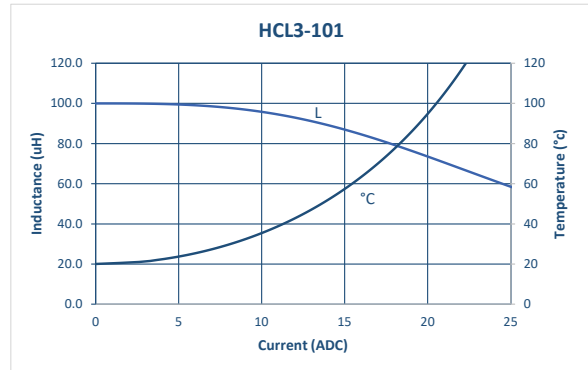
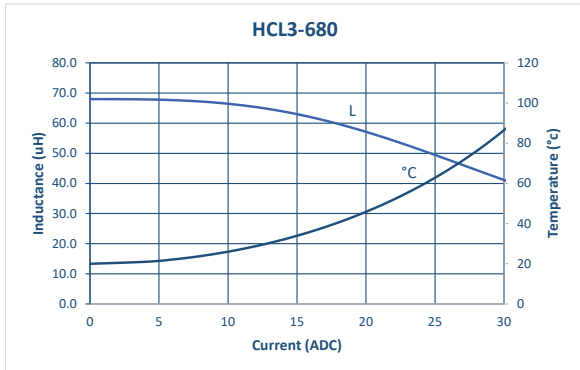
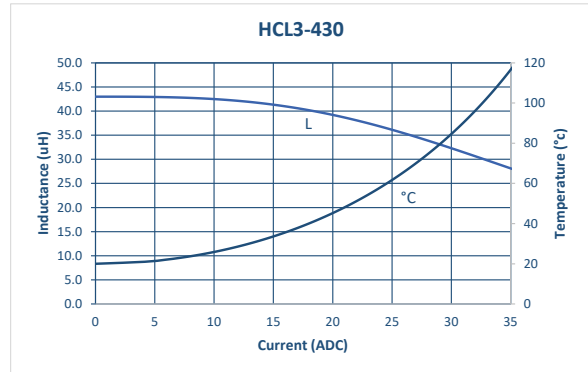
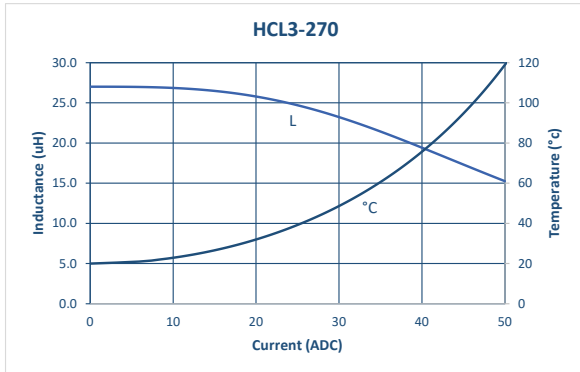
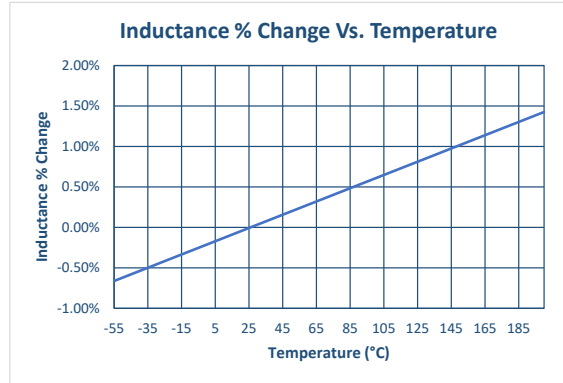


CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

XTHCL3 SERIES



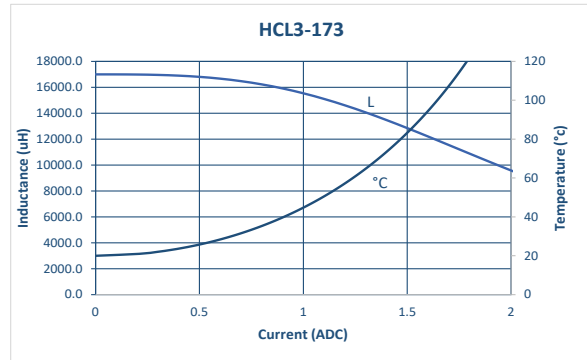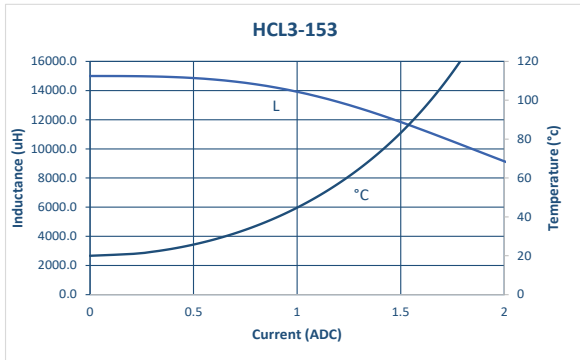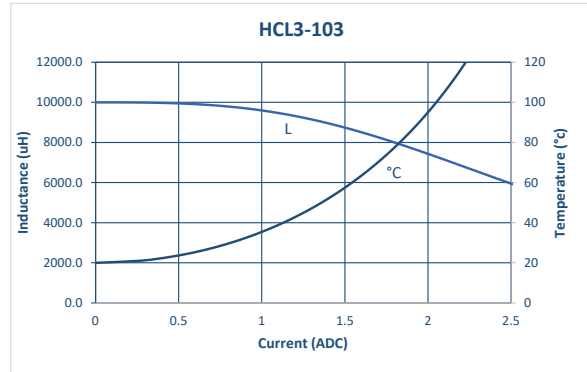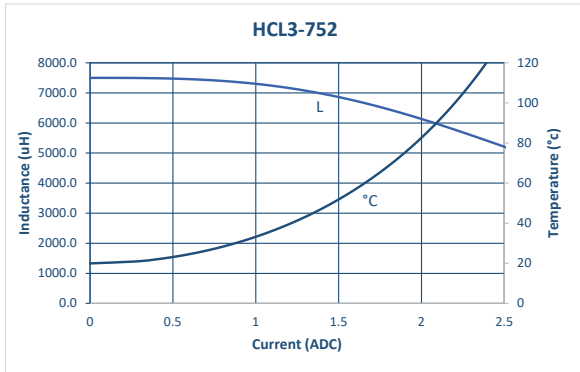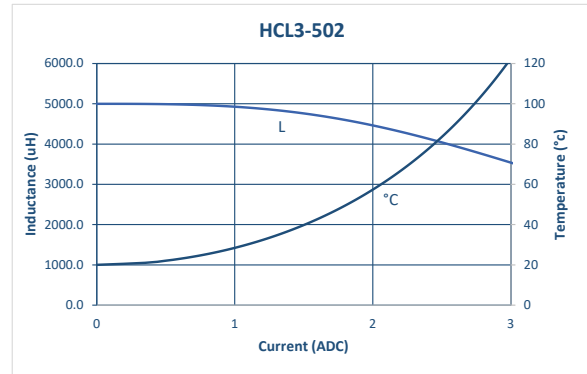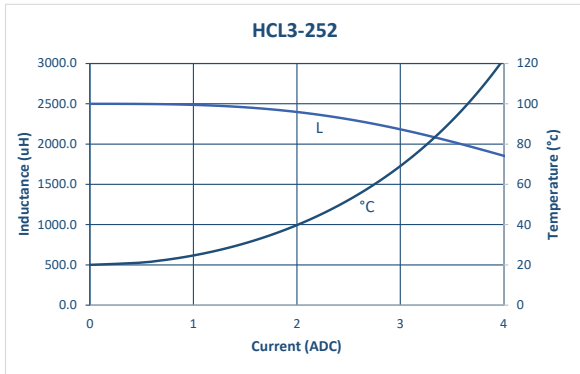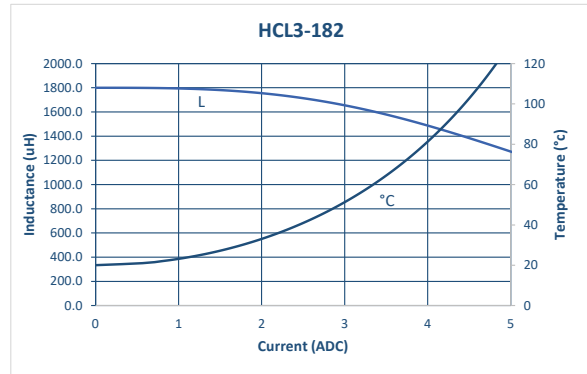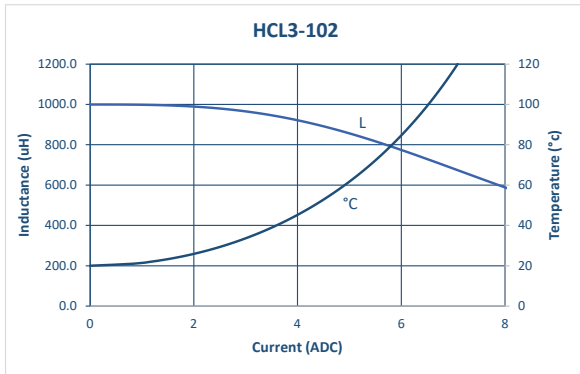

CUSTOM DESIGNS & MODIFICATIONS:

Other electrical configurations and performance characteristics are available in various sizes and package types

XTHCL3 SERIES

